
OFIMAT



■ Code: FTSM 1007 061

■ Description: Operative program with functional benefits

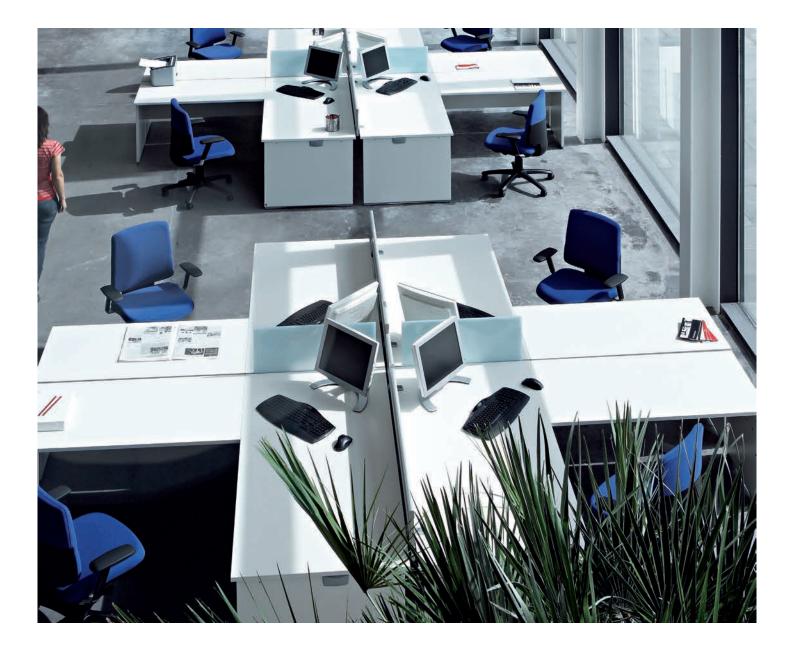

Based on 25mm MFC panel ends(silver or dark grey finish), with polystyrene anti-humidity feet with levelers. Ofimat end panels could be silver, or with the same colour as the top)



We suggest to use this in 80cm width rectangular, crescent or wave desks



We suggest to use this in 60cm width rectangular desks and in the middle of long configurations for a better stability



Polystyrene anti-humidity feet with leveler

■ LINKING SYSTEM

To link Ofimat desks with pedestal or returns, it is necessary to use these two metal pieces (Zamak), epoxy finish which are included in the pedestal or return packages.



DESK TOP FINISHES

MFC (25 mm)














ACABADOS DE LATERALES

MFC (25 mm)











Walnut-N Wengue


(See finishes cards)


FTM 1010 061 **OFIMAT**





■ FRAME

4 or 6 people call centres. Different finishes. Pedestal support or CPU pedestal support. Silver or upholstered desk-mounted screens










For larger call centres, you can use 120° desks **P41**. P41 end panels could receive CPU holders, returns and links, pedestals without top, D80 desk-mounted screen (silver MFC or upholstered finish)



FTM 1010 061 OFIMAT





■ STUDY CARRELS SERIE 500


Progressive Study carrels Serie 500:

- 1 16mm thickness back (optional monitor support)
- (2) Central side panel 25 mm thickness
- (3) End panels 25 mm thickness. Polystyrene feet. **Upholstered finish optional**
- (4) Central side panel 25 mm thickness. Polystyrene feet. **Upholstered finish optional**
- 5) 25 mm thickness MFC top

■ STUDY CARRELS SERIE 120





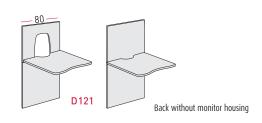

This serie is available in 80cm width (**D121**) or 100cm width(**D122**). Possibility to fix CPU holder to the side panels. 25 mm thickness mfc side panels, 16 mm thickness mfc back panels and 25 mm upholstered side panels. PVC edges 2 and 3 mm. Polystyrene feet.

■ FINISHES

Melamina (25/16 mm)

(See finishes cards)





OFIMAT FTM 1010 061




FRAME

Complete reception counters units. Side panels, 19 mm thickness. PVC edges 2 mm thickness. Desk and shelve, 25 mm thicknessLevellers to avoid any problem with irregular floors. All modules include cable management except PG58. Different accessories available.

Layout samples PG52 PG53 PG53





■ FRONT PANEL FINISHES

MFC (16 mm)




SIDE PANELS FINISHES MFC (19 mm)

Silver Elm

FTM 1010 061 OFIMAT



OFIMAT has been designed to be manufactured with recycled materials 78,57%, danger substances such as chrome, mercury or cadmium are not used in big quantity. Recycables Aluminium, Steel and Woods 100%. Organic volatile Components. Packages manufactured with recycled carton. Ink thinner free.

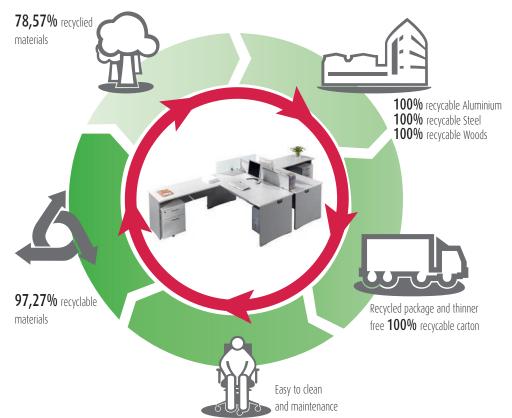



PRODUCTION

Energy use is optimized during the production process. Minimum environmental impact. Last generation technological system in coating processes. Painting that have not been used is recovered to use it again. Zero COVs emissions and other contaminant gas. Close water circuit to clean the metals. Heat recovery. Automatic manufacture systems. Cut process is planned.



TRANSPORT

Optimum packaging to reduce space in transport and save energy.



Long lasting use. Spare parts and replacements available. Easy to clean and maintenance.



97,27% recycable. Easy and quick to split OFIMAT components. Packages are reuse by our supplier to avoid waste generation. Carton used in packages is recyclable.

CERTIFICATES AND REFERENCES

The different programmes get points in different environmental categories to get the LEED certificate (sustainability, material and resources, water, energy and atmosphere, inner environment quality, innovation and design).



PEFC Certificate













E1 by EN 13986 Certificate

OFIMAT FTM 1010 061

ERGONOMICS

OFIMAT available for all type of users. Perfect for any need and keep user's posture in a natural way without any manual adjustment.

STANDARDS

OFIMAT has passed tests done in our technical department as well as the tests done in **AIDIMA** the Technological Institute for furniture. The tests correspond to UNE standards and office desks:

- UNE: EN 527-1:2003. Office Furniture. Desks. Part 1: Dimensions.
- UNE: EN 527-2:2003. Office Furniture. Desks. Part 2: Mechanical security requirements.
- UNE: EN 527-3:2003. Office Furniture. Desks. Part 3: Test to determine stability and structure resistance.

■ ECOLOGY

ENERGY SAVING

The new technological production system included, reduce the energy resources used to manufacture each component. Materials are very well used to avoid wastes.

RECYCLED AND RECYCABLE MATERIALS

ACTIU environmental policy opts to use recycled materials in those components where functionality and lasting is not a condition. Materials used in Ofimat such as Zamak or Plastic are totally recyclable.

SUSTAINABLE CERTIFICATE

ACTIU has **PEFC and FSC** certificate to proof that the wood used in our products comes from sustainable exploitations and **ECODESIGN ISO 14006 certificate**

FTM 1010 061 OFIMAT

■ REMARKABLE VALUES

1 – ACTIU has **PEFC and FSC** certificate to proof that the wood used in our products comes from sustainable exploitations and **ECODESIGN ISO 14006** certificate.

2 – Optional accessories fixed to the beams, modesty panels, screens, CPU holders or fixed pedestals....

OFIMAT FTM 1010 061